


## X-QUISITE FIRE

Finest MC cartridge with patented monobloc-ceramic transducer technology, pure copper coil and advanced titanium-aluminium-wood sandwich-body design. Each cartridge is a unique item regarding colour and gradient.

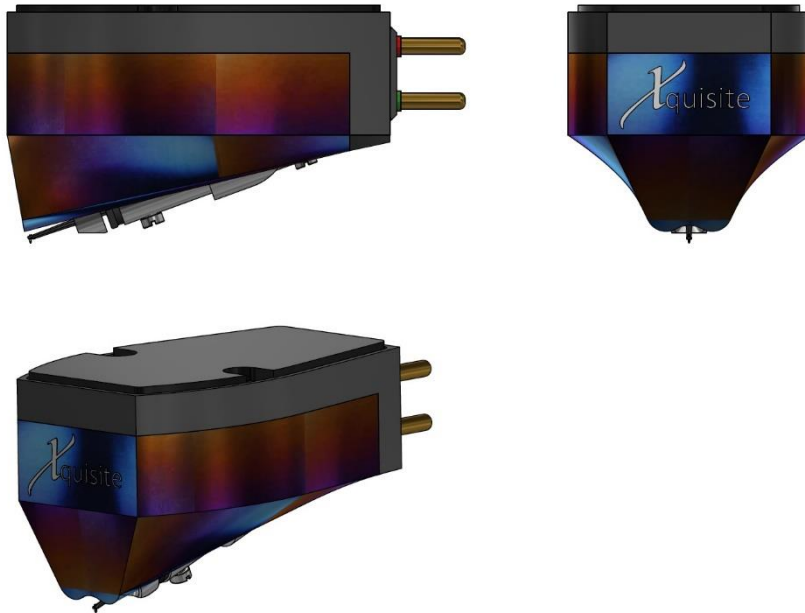

Specification	
Cantilever and coil body:	Monobloc ceramic unit, patented design
Coil:	Copper 4N
Diamond shape:	Micro ridge
Magnet unit:	Neodym-Armco, reduced eddy current loss design
Body:	Titanium Unique
Connection:	1/2" – 4pin, gold plated
Vertical Tracking Angle:	20°
Weight:	16,6g
Tracking force:	1,9...2,1g
Output voltage:	0,3mV @ 5cm/s
Compliance:	12µm/mN
Frequency response:	20-30'000Hz
±2dB:	40-15'000Hz
FIM distortion	max. 0.2%
Impedance:	2 x 24 Ohms
Recommended load:	400...800 Ohms