




Description

16 wire braid of TC and VS conductors around our X38R stabilizing core. The best of both TC and VS attributes with a lower noise floor. Expanded braid geometry offers better mechanical and electrical damping as well as extends dynamic range on both ends of the spectrum give you a huge soundstage and precise imaging. All the instruments get a little more elbow room when you move to Summit series speaker cables.




MONOCLE-X

Deliver Truth



Features

- ⦿ Low loss fluorocarbon dielectric
- ⦿ Polyethylene dielectric
- ⦿ VariStrand copper conductors
- ⦿ 16 wire counter opposed helix

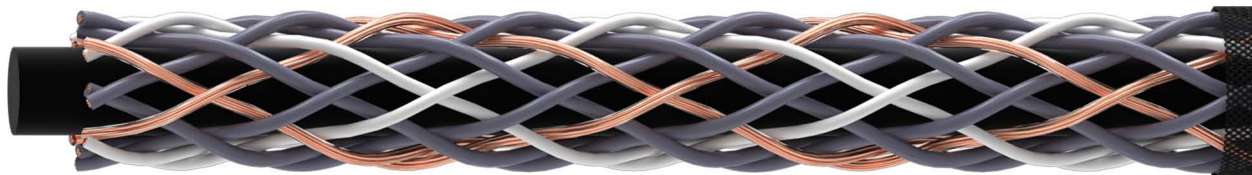

Connector Options

Electrical Specifications



WBT 0681 CU



WBT 0661 CU




WBT 0610 CU

Standard

(Cp) parallel capacitance: 789 pF / meter

(Ls) series inductance: 0.946 uH / meter

(Rdc) dc loop resistance: 0.036 Ohm / meter



0.9375"
(23.125mm)