



Aquisite



Aluminum
Solid Coil Core



Aluminum / Boron
Solid Coil Core



Aluminum / Sapphire
Solid Coil Core



Titanium / Sapphire
Multi-Layer Coil Core



Monoblock Ceramic
Ironless Coil Core





Finest MC-Cartridges - Handcrafted in Switzerland



JSD Novel Gold





Premier MC-Carriage - Handcrafted in Switzerland




JSD Novel Gold









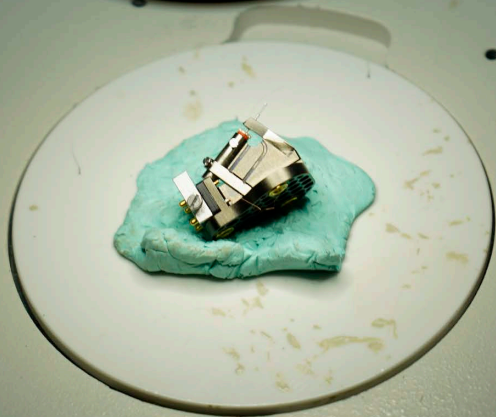

S0544



S0542



S0541



S0506



S0507



S0508



S0509



S0510



S0501



S0502



S0503



S0504



S0505





S0501

S0506

S0511

S0502

S0507

S0512

S0503

S0508

S0513

S0504

S0509

S0505

S0510



























ryeco
microscopes
swiss quality

























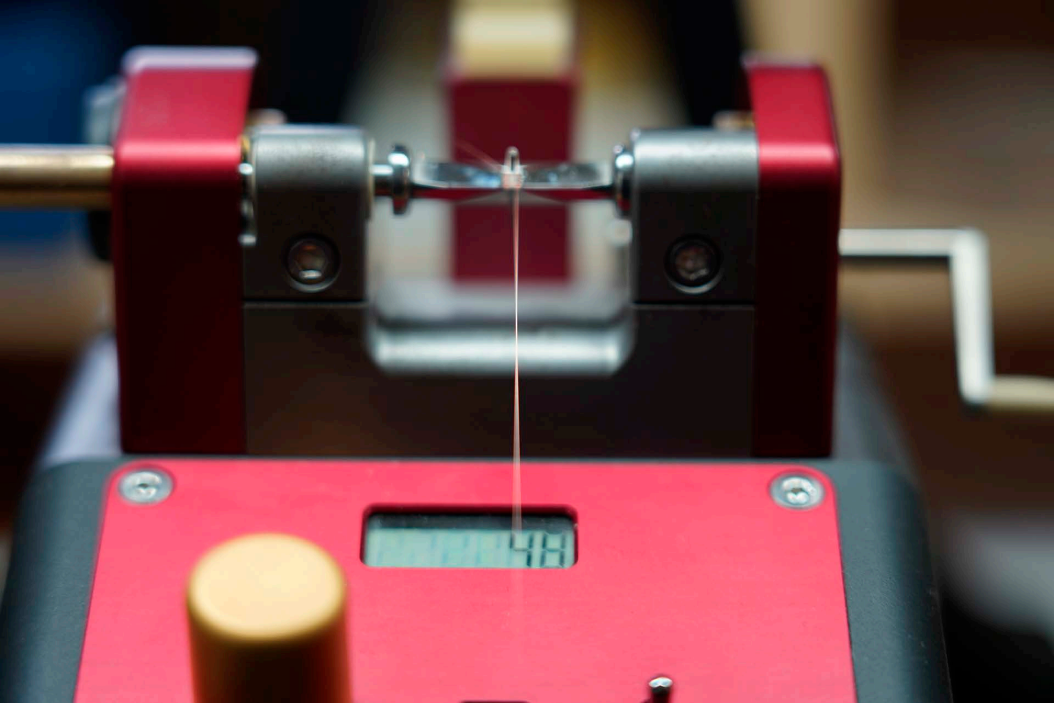

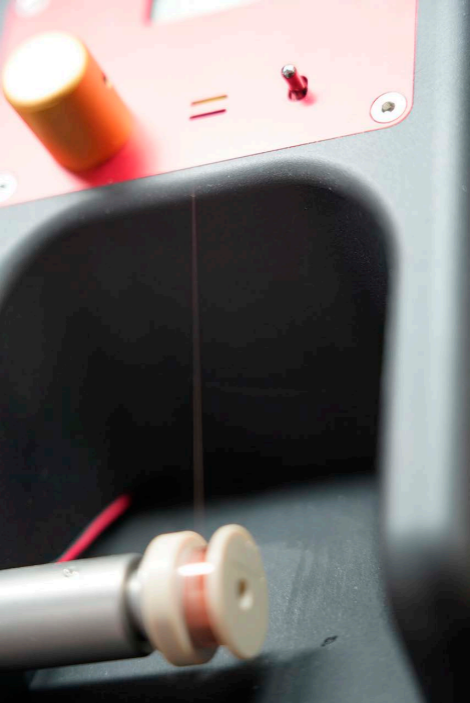





















511

506

507

508

509


503


504


505

Lager

| Time | Value | Unit |
|------|-------|------|
| 0 | 0.00 | 0.00 |
| 1 | 0.01 | 0.01 |
| 2 | 0.02 | 0.02 |
| 3 | 0.03 | 0.03 |
| 4 | 0.04 | 0.04 |
| 5 | 0.05 | 0.05 |
| 6 | 0.06 | 0.06 |
| 7 | 0.07 | 0.07 |
| 8 | 0.08 | 0.08 |
| 9 | 0.09 | 0.09 |
| 10 | 0.10 | 0.10 |
| 11 | 0.11 | 0.11 |
| 12 | 0.12 | 0.12 |
| 13 | 0.13 | 0.13 |
| 14 | 0.14 | 0.14 |
| 15 | 0.15 | 0.15 |
| 16 | 0.16 | 0.16 |
| 17 | 0.17 | 0.17 |
| 18 | 0.18 | 0.18 |
| 19 | 0.19 | 0.19 |
| 20 | 0.20 | 0.20 |
| 21 | 0.21 | 0.21 |
| 22 | 0.22 | 0.22 |
| 23 | 0.23 | 0.23 |
| 24 | 0.24 | 0.24 |
| 25 | 0.25 | 0.25 |
| 26 | 0.26 | 0.26 |
| 27 | 0.27 | 0.27 |
| 28 | 0.28 | 0.28 |
| 29 | 0.29 | 0.29 |
| 30 | 0.30 | 0.30 |
| 31 | 0.31 | 0.31 |
| 32 | 0.32 | 0.32 |
| 33 | 0.33 | 0.33 |
| 34 | 0.34 | 0.34 |
| 35 | 0.35 | 0.35 |
| 36 | 0.36 | 0.36 |
| 37 | 0.37 | 0.37 |
| 38 | 0.38 | 0.38 |
| 39 | 0.39 | 0.39 |
| 40 | 0.40 | 0.40 |
| 41 | 0.41 | 0.41 |
| 42 | 0.42 | 0.42 |
| 43 | 0.43 | 0.43 |
| 44 | 0.44 | 0.44 |
| 45 | 0.45 | 0.45 |
| 46 | 0.46 | 0.46 |
| 47 | 0.47 | 0.47 |
| 48 | 0.48 | 0.48 |
| 49 | 0.49 | 0.49 |
| 50 | 0.50 | 0.50 |
| 51 | 0.51 | 0.51 |
| 52 | 0.52 | 0.52 |
| 53 | 0.53 | 0.53 |
| 54 | 0.54 | 0.54 |
| 55 | 0.55 | 0.55 |
| 56 | 0.56 | 0.56 |
| 57 | 0.57 | 0.57 |
| 58 | 0.58 | 0.58 |
| 59 | 0.59 | 0.59 |
| 60 | 0.60 | 0.60 |
| 61 | 0.61 | 0.61 |
| 62 | 0.62 | 0.62 |
| 63 | 0.63 | 0.63 |
| 64 | 0.64 | 0.64 |
| 65 | 0.65 | 0.65 |
| 66 | 0.66 | 0.66 |
| 67 | 0.67 | 0.67 |
| 68 | 0.68 | 0.68 |
| 69 | 0.69 | 0.69 |
| 70 | 0.70 | 0.70 |
| 71 | 0.71 | 0.71 |
| 72 | 0.72 | 0.72 |
| 73 | 0.73 | 0.73 |
| 74 | 0.74 | 0.74 |
| 75 | 0.75 | 0.75 |
| 76 | 0.76 | 0.76 |
| 77 | 0.77 | 0.77 |
| 78 | 0.78 | 0.78 |
| 79 | 0.79 | 0.79 |
| 80 | 0.80 | 0.80 |
| 81 | 0.81 | 0.81 |
| 82 | 0.82 | 0.82 |
| 83 | 0.83 | 0.83 |
| 84 | 0.84 | 0.84 |
| 85 | 0.85 | 0.85 |
| 86 | 0.86 | 0.86 |
| 87 | 0.87 | 0.87 |
| 88 | 0.88 | 0.88 |
| 89 | 0.89 | 0.89 |
| 90 | 0.90 | 0.90 |
| 91 | 0.91 | 0.91 |
| 92 | 0.92 | 0.92 |
| 93 | 0.93 | 0.93 |
| 94 | 0.94 | 0.94 |
| 95 | 0.95 | 0.95 |
| 96 | 0.96 | 0.96 |
| 97 | 0.97 | 0.97 |
| 98 | 0.98 | 0.98 |
| 99 | 0.99 | 0.99 |
| 100 | 1.00 | 1.00 |

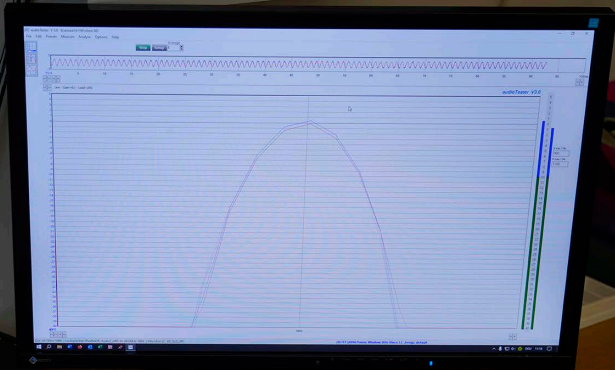


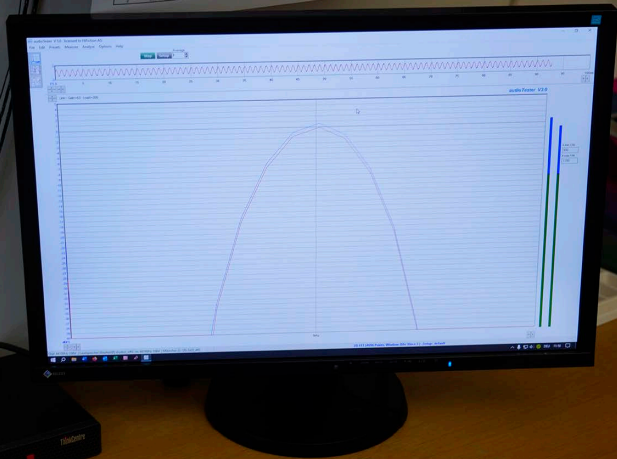

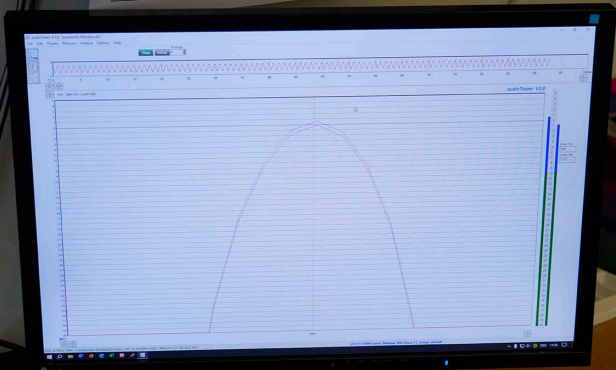

Handwritten tables on a piece of paper taped to the wall behind the monitor. The tables appear to be data logs or calibration charts, organized into columns with headers and numerical entries.

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
|------|------|------|------|------|------|------|------|------|------|
| 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

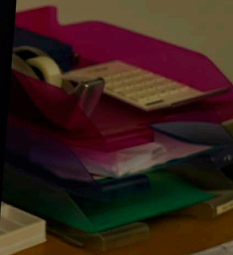




| Time | Value | Unit |
|------|-------|------|
| 0.00 | 0.00 | dB |
| 0.10 | 0.00 | dB |
| 0.20 | 0.00 | dB |
| 0.30 | 0.00 | dB |
| 0.40 | 0.00 | dB |
| 0.50 | 0.00 | dB |
| 0.60 | 0.00 | dB |
| 0.70 | 0.00 | dB |
| 0.80 | 0.00 | dB |
| 0.90 | 0.00 | dB |
| 1.00 | 0.00 | dB |




| Time | Value | Unit |
|------|-------|------|
| 0.00 | 0.00 | dB |
| 0.10 | 0.00 | dB |
| 0.20 | 0.00 | dB |
| 0.30 | 0.00 | dB |
| 0.40 | 0.00 | dB |
| 0.50 | 0.00 | dB |
| 0.60 | 0.00 | dB |
| 0.70 | 0.00 | dB |
| 0.80 | 0.00 | dB |
| 0.90 | 0.00 | dB |
| 1.00 | 0.00 | dB |

| Time | Value | Unit |
|------|-------|------|
| 0.00 | 0.00 | dB |
| 0.10 | 0.00 | dB |
| 0.20 | 0.00 | dB |
| 0.30 | 0.00 | dB |
| 0.40 | 0.00 | dB |
| 0.50 | 0.00 | dB |
| 0.60 | 0.00 | dB |
| 0.70 | 0.00 | dB |
| 0.80 | 0.00 | dB |
| 0.90 | 0.00 | dB |
| 1.00 | 0.00 | dB |

| Time | Value | Unit |
|------|-------|------|
| 0.00 | 0.00 | dB |
| 0.10 | 0.00 | dB |
| 0.20 | 0.00 | dB |
| 0.30 | 0.00 | dB |
| 0.40 | 0.00 | dB |
| 0.50 | 0.00 | dB |
| 0.60 | 0.00 | dB |
| 0.70 | 0.00 | dB |
| 0.80 | 0.00 | dB |
| 0.90 | 0.00 | dB |
| 1.00 | 0.00 | dB |

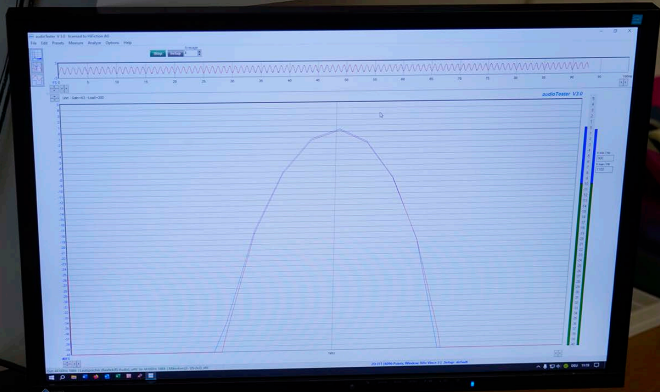


| Order | W | Q | Order | W | Q | Order | W | Q |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 |
| 1.0 | 0.00 | 0.00 | 1.0 | 0.00 | 0.00 | 1.0 | 0.00 | 0.00 |
| 2.0 | 0.00 | 0.00 | 2.0 | 0.00 | 0.00 | 2.0 | 0.00 | 0.00 |
| 3.0 | 0.00 | 0.00 | 3.0 | 0.00 | 0.00 | 3.0 | 0.00 | 0.00 |
| 4.0 | 0.00 | 0.00 | 4.0 | 0.00 | 0.00 | 4.0 | 0.00 | 0.00 |
| 5.0 | 0.00 | 0.00 | 5.0 | 0.00 | 0.00 | 5.0 | 0.00 | 0.00 |
| 6.0 | 0.00 | 0.00 | 6.0 | 0.00 | 0.00 | 6.0 | 0.00 | 0.00 |
| 7.0 | 0.00 | 0.00 | 7.0 | 0.00 | 0.00 | 7.0 | 0.00 | 0.00 |
| 8.0 | 0.00 | 0.00 | 8.0 | 0.00 | 0.00 | 8.0 | 0.00 | 0.00 |
| 9.0 | 0.00 | 0.00 | 9.0 | 0.00 | 0.00 | 9.0 | 0.00 | 0.00 |
| 10.0 | 0.00 | 0.00 | 10.0 | 0.00 | 0.00 | 10.0 | 0.00 | 0.00 |

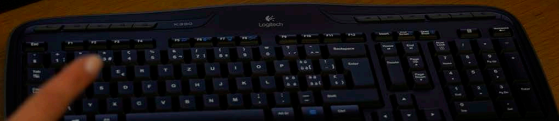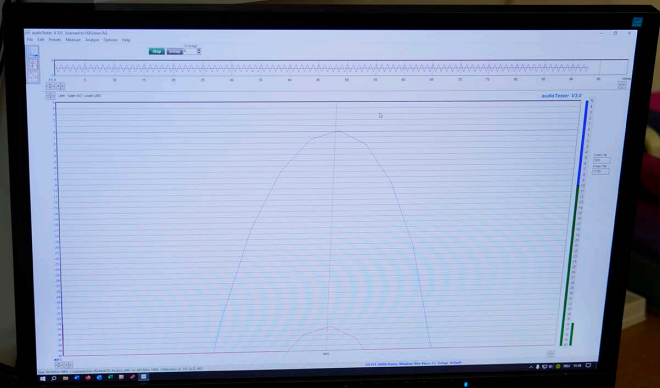


File: Empty_1_0p_10000_0
Date: 27.12.2016 11:00:01

Save Settings

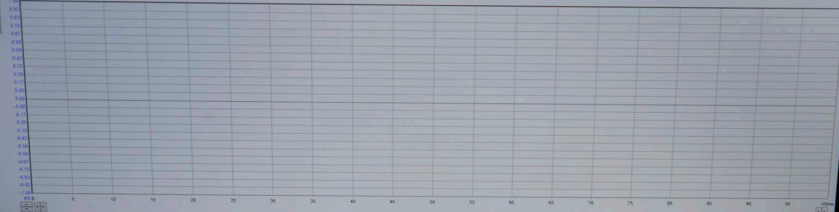

Line: Gal-H3 - Load-300

avulioTester V3.0

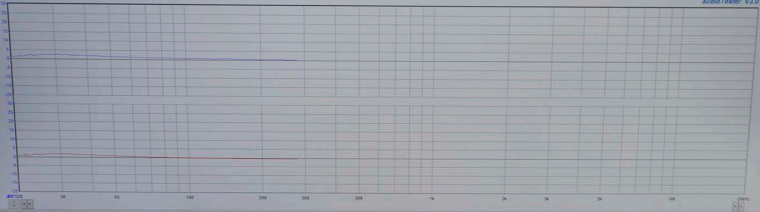

Save Settings default



| Frequency [Hz] | Intensity [dB] | Left Ear | Right Ear |
|----------------|----------------|----------|-----------|
| 125 | 20 | | |
| 250 | 20 | | |
| 500 | 20 | | |
| 1000 | 20 | | |
| 2000 | 20 | | |
| 4000 | 20 | | |
| 8000 | 20 | | |
| 16000 | 20 | | |
| 32000 | 20 | | |
| 64000 | 20 | | |
| 128000 | 20 | | |

FIM (Hz)
L 0.15 R 0.15

A. Janni

Visum







Xquisite

Finest MC cartridge with patented monobloc-ceramic transducer

Model: 57

S/N: X275

Impedance: $2 \times 20 \Omega$

Rec. load: $400 \dots 800 \Omega$

Weight: 76.3g

Tracking force: 13...2.7g

Trackability: 80 μ m

f_M: 0.08 %

XT att. L→R: 34 dB

XT att. R→L: 34 dB

Output @ 5cm/s: 0.31 mV

Channel balance: 0.1 dB

Fr. response ± 3 dB: 20... 20'000 Hz

Visum: *LA*



Xquisite

Finesst MC cartridge with patented monobloc-ceramic transducer

Model: 57

S/N: X275

Impedance: $2 \times 20 \Omega$

Rec. load: $400 \dots 800 \Omega$

Weight: 76.3g

Tracking force: 1.3...2.7g

Trackability: 80 μ m

f/m: 0.08 /.

XT att. L→R: 34dB

XT att. R→L: 34dB

Output @ 5cm/s: 0.31mV

Channel balance: 0.1dB

Fr. response $\frac{300}{20}$ 20... 10'000 Hz

Visum: *LB*





