




## DATASHEET EMT 128

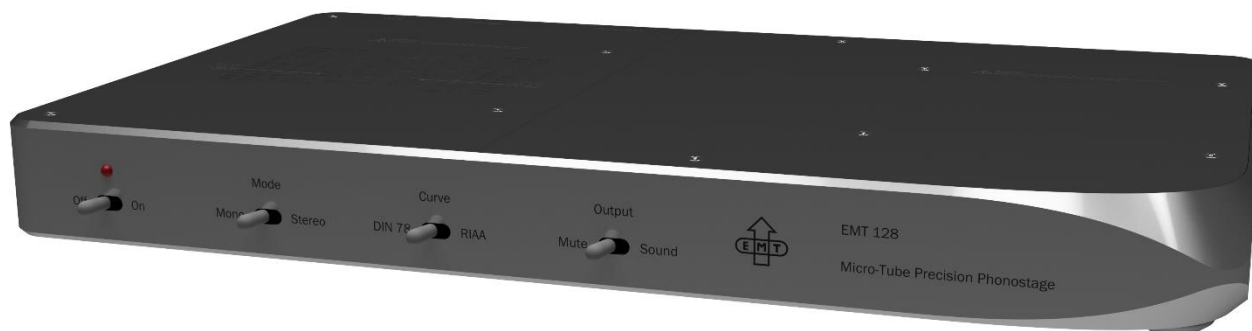

### Micro-Tube Precision Phonostage

- Unique micro-tube design for most musical performance
- Customized input- and output-transformers
- Electronics and power-supply built into a massive aluminium-case
- Advanced vibration control technology

Specification	
MC-Input:	RCA
Line Output:	XLR (1=GND, 2=HOT, 3=COLD)
Mode:	Stereo / Mono
Curve:	RIAA / DIN 78
Total Gain:	64dB / 70dB (set by internal jumpers)
Total Harmonic Distortion:	-70dB @ 1kHz
Crosstalk:	>70dB
Output impedance:	<500 Ohms
Mains input:	INT: 230 VAC US: 115 VAC JP: 100 VAC
Power Consumption:	25 Watts
Operating temperature:	15...35 °C 60...95 °F
Operating environment:	Indoor only
Dimensions:	480x315x60 mm 19x12.5x2.3 inches
Weight:	12kg