



ESOTERIC

POWER

CLOCK

USB

NET

DSD

CLK.in10M F0FF XLR:

22.5MHz

INPUT

MENU

<

>

N-01XD

POWER

USB

POWER


USB





XLR/ESL-A

RCA

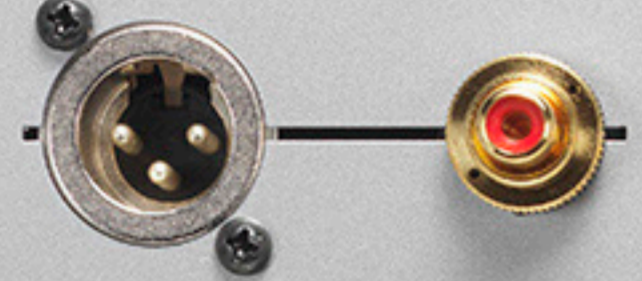

CLOCK

OUT

10MHz IN



ETHERNET

USB DRIVE
(5V 0.5A)



USB

R


ES-LINK

L



XLR/ESL-A

RCA

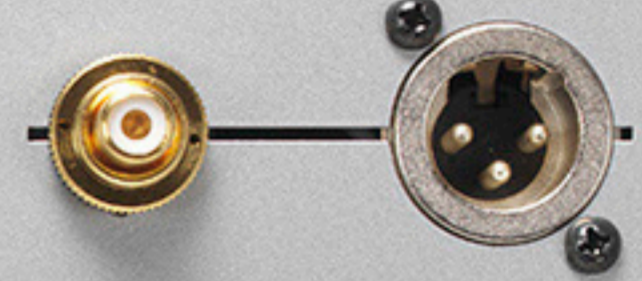

LINE OUT R



DIGITAL IN

RCA 2

RCA 1



OPTICAL

XLR



LINE OUT L



THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS:
(1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRED OPERATION.



CAN ICES-3(B)/NMB-3(B)

SOFTWARE

~IN

