









IsoTek®
super titan
EVM



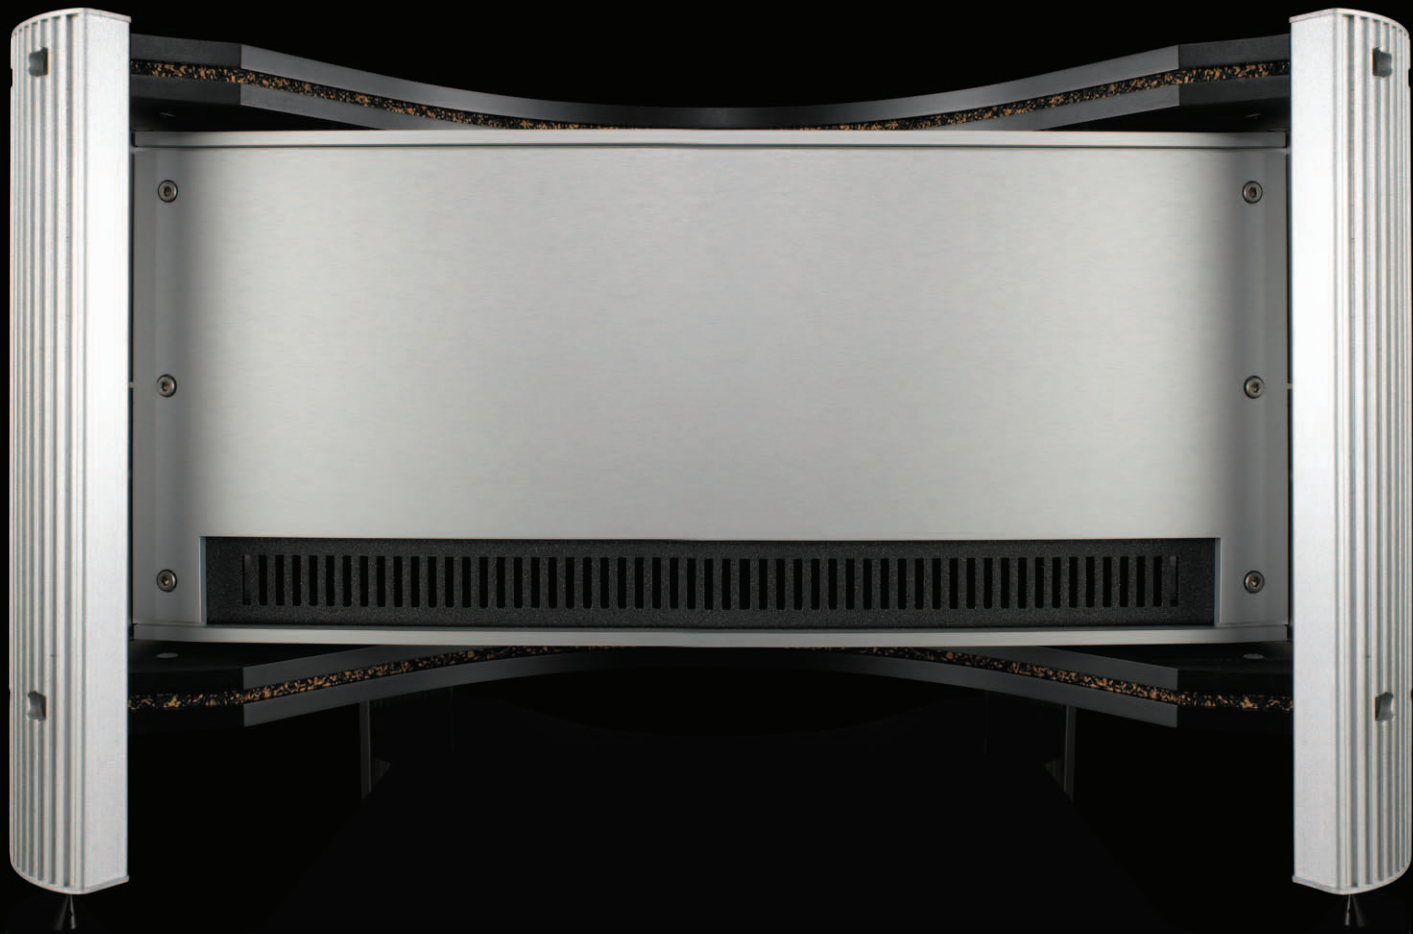

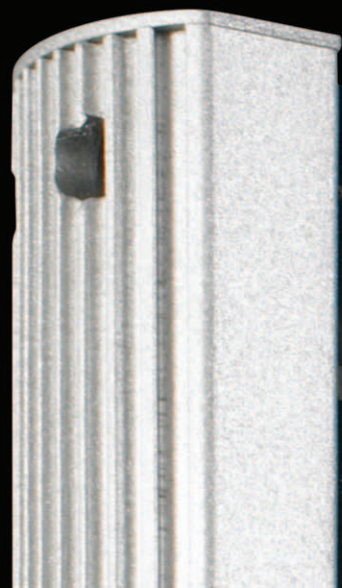

100 - 240V ~ 32A
50/60Hz



Super Titan Outputs: Total: 32A 3520 - 7360VA



The Combined MAX current (4 outlets) should not exceed 32A

100 - 240V ~ 20A
50/60Hz



Super Titan Power Input:

Use this inlet to power the Super Titan.

Use the power cord with the black, colour coded silver plated 32A locking Neutrik PowerCon.

Designed by IsoTek® in England
www.isoteksystems.com



Super Titan Power Output:

Main: 7360VA at 230V (3680VA at 115V)
Auxiliary: 4600VA at 230V (2300VA at 115V)
Combined: 11,960VA at 230V (5980VA at 115V)
Transient power 5x rated power for 5ms



DANGER HIGH VOLTAGE
Risk of electric shock.
Do not remove covers or open panels.
Refer to qualified personnel for servicing.

SERIAL NO.

Super Titan Auxiliary Power Input:

Use this inlet to power additional IsoTek conditioning equipment using Super Titan.



©2010 Audio Power Systems GmbH all rights reserved

