




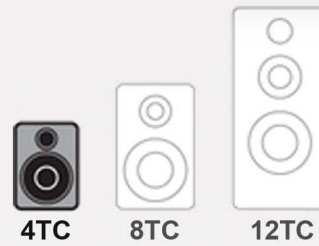

Clean, clear sound from one of our most accurate speaker cables. 4TC is a great choice for small monitors in a dedicated two channel system. Known for it's neutral sound these cables will shine a light on all your systems capabilities.

**4TC**


**DELIVER TRUTH**



Ask about Bi Wire Options


-  Low loss fluorocarbon dielectric
-  8 wire counter opposed helix
-  VariStrand™ copper conductors
-  Nitrogen assisted hand soldered termination

**IMPEDANCE**

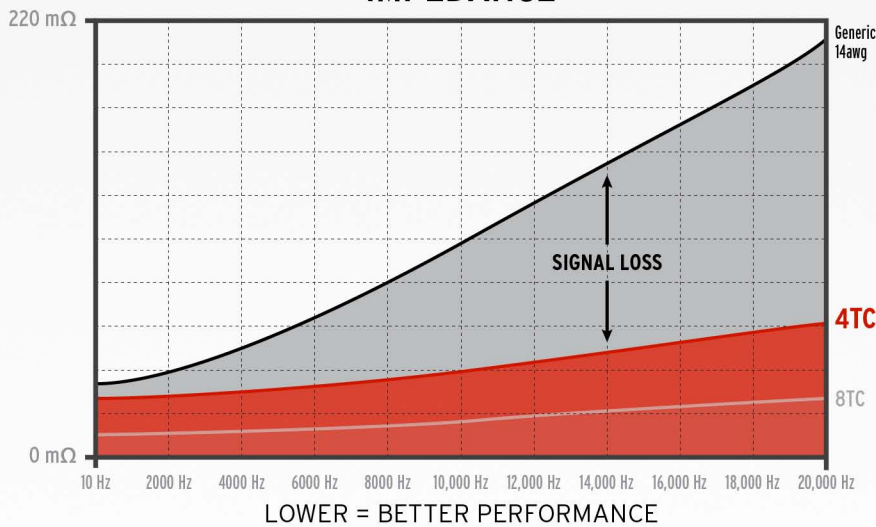

**Electrical Specifications**

(Cp) parallel capacitance: 136.0 pF / meter  
 (Ls) series inductance: 0.225 μH / meter  
 (Rdc) dc loop resistance: 0.015 Ω / meter  
 2 x 13AWG(2.486mm<sup>2</sup>) conductors

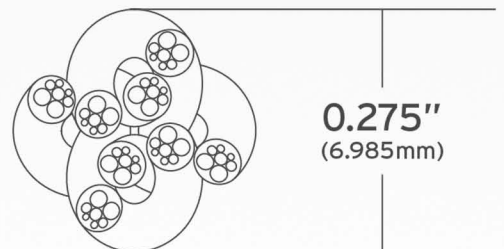

**Connector Options**

- |   |                      |   |                      |   |                    |
|---|----------------------|---|----------------------|---|--------------------|
|  | <b>Spade</b>         |  | <b>Postmaster 33</b> |  | <b>WBT-0681 cu</b> |
|  | <b>SBAN</b>          |  | <b>Postmaster N3</b> |  | <b>WBT-0661 cu</b> |
|  | <b>Postmaster 25</b> |  | <b>WBT-0645</b>      |  | <b>WBT-0610 cu</b> |