






An industry standard from the time this speaker cable was introduced. 8TC is a great solution for longer runs, tough speaker loads or internal biwire applications. Often regarded as a neutral cable able to deliver accurate dynamics and large soundstage.

8TC


DELIVER TRUTH



Ask about Bi Wire Options


-  **Low loss fluorocarbon dielectric**
-  **16 wire counter opposed helix**
-  **VariStrand™ copper conductors**
-  **Nitrogen assisted hand soldered termination**

IMPEDANCE

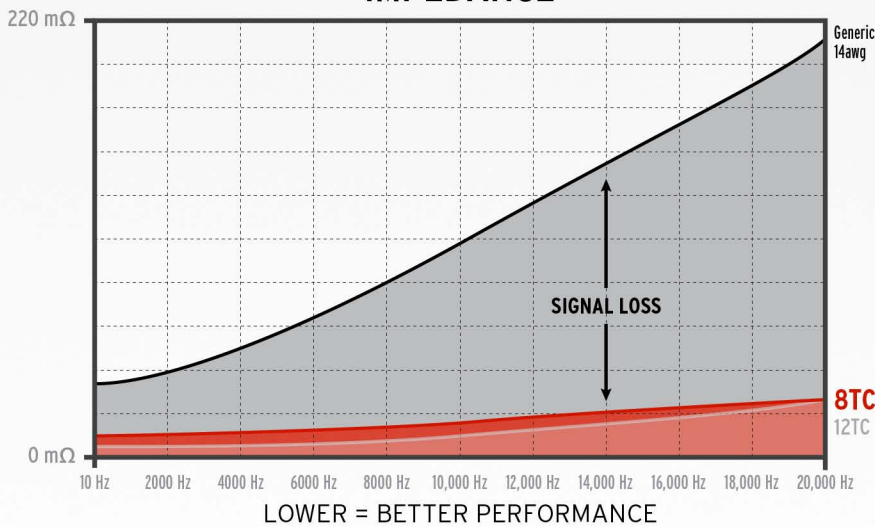

Electrical Specifications

(Cp) parallel capacitance: 346.0 pF / meter
 (Ls) series inductance: 0.00 μH / meter
 (Rdc) dc loop resistance: 0.008 Ω / meter
 2 x 10AWG(2.486mm²) conductors

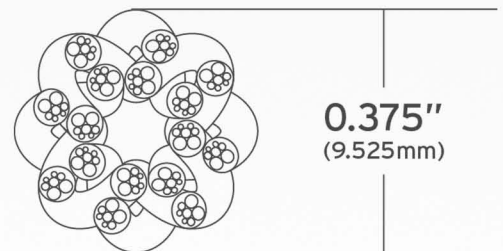

Connector Options

- | | | | | | |
|---|----------------------|---|----------------------|---|--------------------|
|  | Spade |  | Postmaster 33 |  | WBT-0681 cu |
|  | SBAN |  | Postmaster N3 |  | WBT-0661 cu |
|  | Postmaster 25 |  | WBT-0645 |  | WBT-0610 cu |