




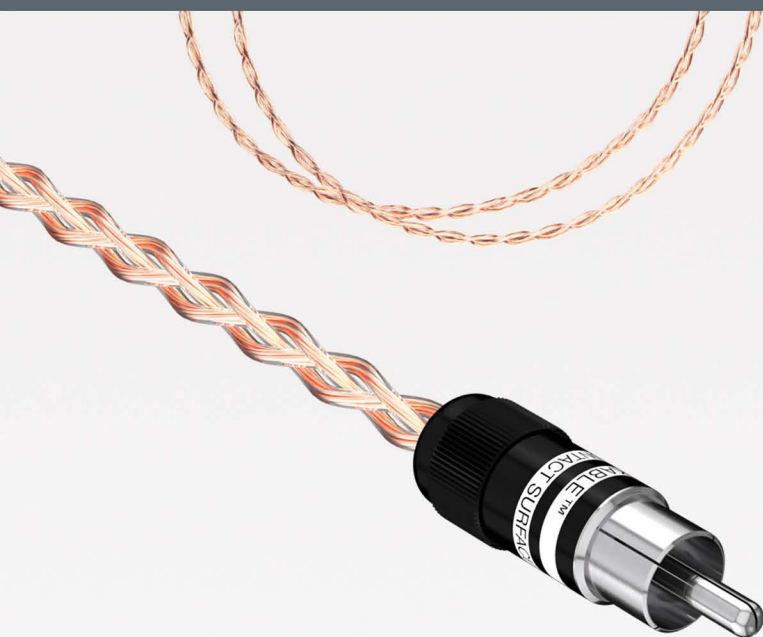

Non-shielded, classic Kimber Kable three wire braided copper interconnect will deliver deep, holographic imaging. Timbre's has a great ability to pop a central performer forward in the soundstage with clean and clear separation of instruments. Get a glimpse past the what and into the "why" on all your favorite albums.

**TIMBRE**

**INVITE ACCURACY**



-  **3 wire quadradic braid**
-  **VariStrand™ copper conductors**
-  **Nitrogen assisted hand soldered termination**
-  **Low loss fluocarbon dielectric**



**Connector Options**



**Ultraplate Black**



**WBT-0114**



**WBT-0102 Cu**



**XLR**

**Electrical Specifications**

**Single-Ended (RCA)**

(Cp) parallel capacitance: 62.10 pF / meter  
 (Ls) series inductance: 0.493 μH / meter  
 (Rdc) dc loop resistance: 0.057 Ω / meter

**Balanced (XLR)**

(Cp) parallel capacitance: 45.90 pF / meter  
 (Ls) series inductance: 1.00 μH / meter  
 (Rdc) dc loop resistance: 0.0822 Ω / meter

