




AUDIO NOTE

Handcrafted HIGH-END Audio Components



Overture
Integrated Amplifier

Integrated Amplifier
Overture

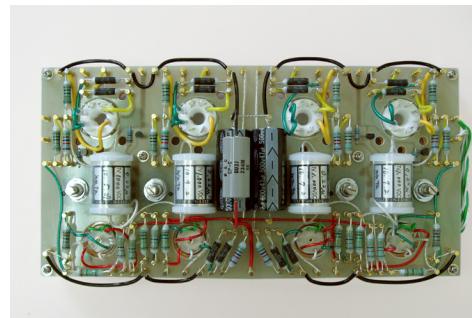

Features

- High quality handcrafting with module style amplifier section, best component placements, signal wiring and ground layout.
- Silver foil coupling capacitors are adopted in both driver and output stages. Decouplings are carefully placed along all stages for natural, stress-free music performance.
- Newly developed CCB circuit guarantees signals purity. It stops signals from flowing through biasing trim pot. Tonal quality is drastically increased.
- KONDO silver wires KSL-VzII and SSW are adopted. Tremendous hours of listening and comparisons were spent for the selections of parts.

Specifications

Max. Output Power	32W
Frequency Response	6 - 140kHz (+0dB -3dB, 1W)
Total Harmonic Distortion	0.08% (1kHz, 1W)
Line Input	1, 2, 3, 4
Input Impedance	100kΩ
Noise	0.5mV
Vacuum Tubes	4 x EL34, 2 x 12BH7, 2 x 6072
Power Consumption	180W
Size	W438 x H201 x D409
Weight	20.5kg