





GB-FC0779
HT



PURE
CLASS A | AMS100

by MUSICAL FIDELITY



MUSICAL FIDELITY


by MUSICAL FIDELITY

• HANG
• OPERATE
• TEMPERATURE

POWER

• HANG
• OPERATE
• TEMPERATURE

POWER

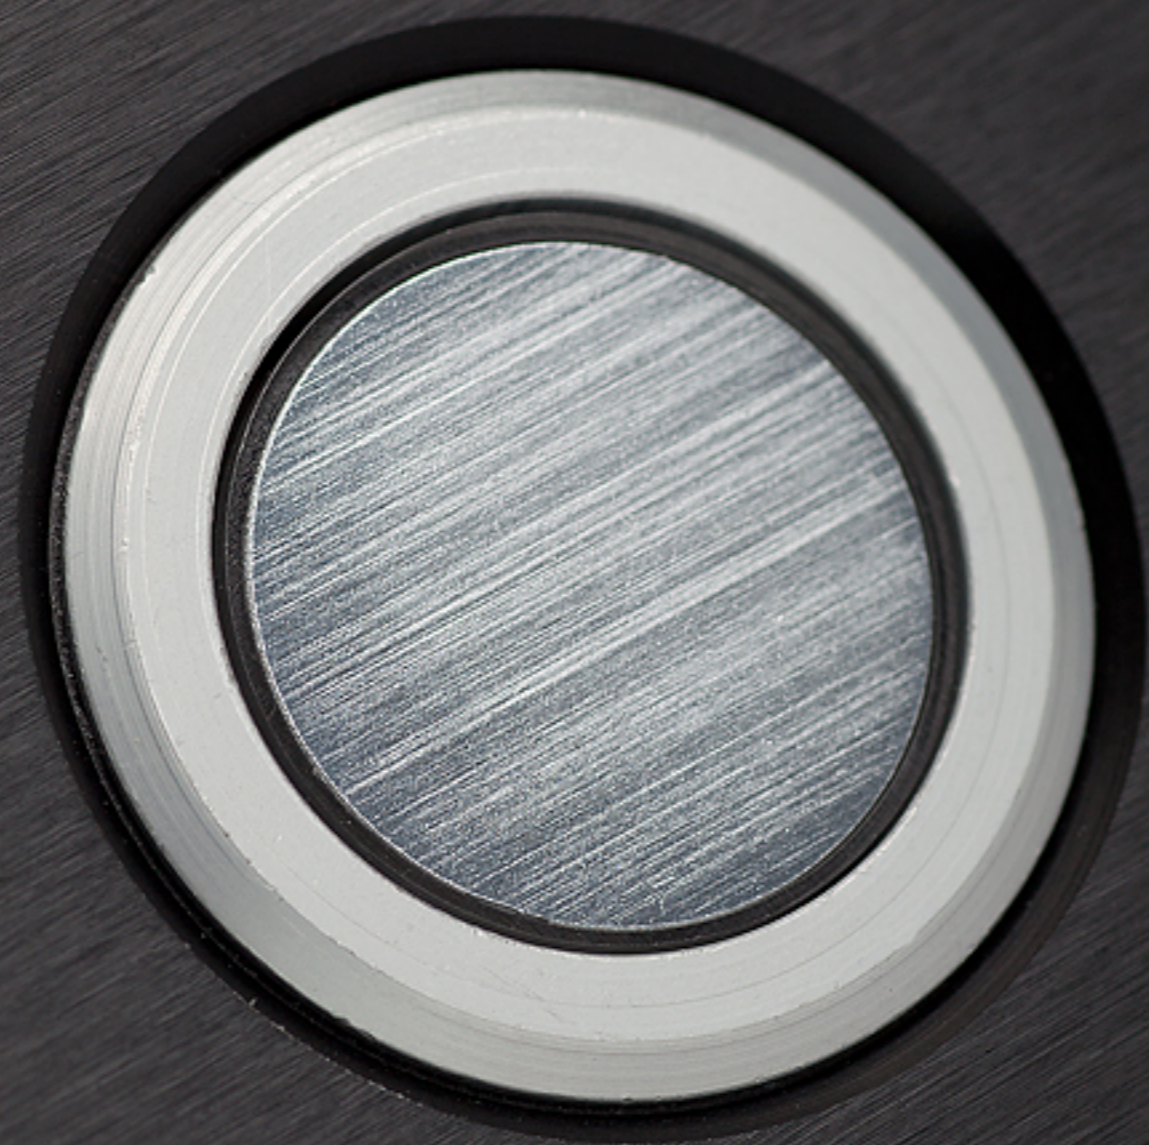

RIGHT
SPEAKER OUTPUT




RIGHT
SPEAKER OUTPUT



PURE CLASS A
AMS100
POWER AMPLIFIER
MUSICAL FIDELITY

DESIGNED AND BUILT IN ENGLAND



RIGHT RCA INPUT

LEFT RCA INPUT

RIGHT XLR BALANCED INPUT

LEFT XLR BALANCED INPUT



POWER

OFF



ON

TRIGGER

POWER CONSUMPTION 120W



POWER CONSUMPTION 120W



LEFT
SPEAKER OUTPUT



LEFT
SPEAKER OUTPUT



CAUTION


MOUNT UNIT ON SOLID SURFACE.
DO NOT REMOVE SCREWS OR COVERS
UNDER ANY CIRCUMSTANCES.
NO USER SERVICEABLE COMPONENTS. NOISE.
REFER SERVICING TO QUALIFIED ENGINEER.
SEE OWNERS MANUAL
FOR FURTHER INFORMATION.

DATE OF MANUFACTURE

SERIAL NUMBER

CE

CE

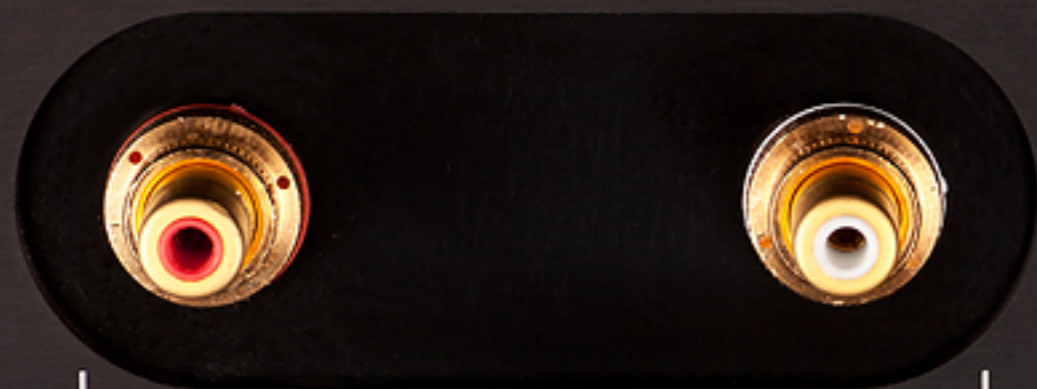

RIGHT RCA
INPUT

LEFT RCA
INPUT




RIGHT XLR
BALANCED INPUT


LEFT XLR
BALANCED INPUT



POWER
OFF

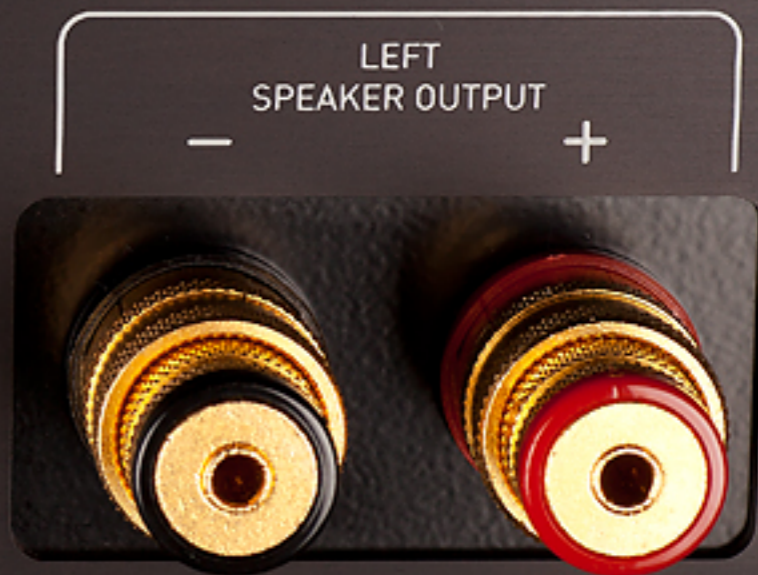

LEFT
SPEAKER OUTPUT



LEFT
SPEAKER OUTPUT



RIGHT RCA INPUT

LEFT RCA INPUT

RIGHT XLR BALANCED INPUT

LEFT XLR BALANCED INPUT

RIGHT SPEAKER OUTPUT +

LEFT SPEAKER OUTPUT +

POWER OFF

ON TRIGGER

POWER CONSUMPTION 1200W

RIGHT
SPEAKER OUTPUT



PURE CLASS A

AMS100

POWER AMPLIFIER

by

MUSICAL FIDELITY

DESIGNED AND BUILT IN ENGLAND

~ 50/60Hz

THIS APPLIANCE
MUST BE
EARTHED

IMPORTANT

POWER
OFF



ON

TRIGGER



POWER CONSUMPTION 1200W

