

TEAC

ON



STANDBY



TEAC



BRIGHT
DARK



METER
+20
OFF



INPUT
XLR
RCA

AP-701

TEAC

ON



STANDBY



BRIGHT



DARK

METER

+20



OFF

INPUT

XLR



RCA

AP-701







+

R

-

SPEAKER IMPEDANCE
(4-8Ω)
CLASS 2 WIRING

SPEAKER

- 1. COMMON
- 2. HOT (+)
- 3. COLD (-)

XLR

R

RCA

OUTPUT MODE
STEREO

BI-AMP
(MONO)

L

RCA

L

XLR

INPUTS

+

L

-

SPEAKER IMPEDANCE
(4-8Ω)
CLASS 2 WIRING

SPEAKER

LAITE ON LITETTÄVÄ SUOJAKOSKETTIMILLA
VARUSTETTUUN PISTORASIAAN.
APPARATET MÅ TILKOPLES
JORDET STIKKONTAKT.
APPARATEN SKALL ANSLUTAS TILL
JORDAT UTTAG.

TEAC MODEL NO. AP-701
STEREO POWER AMPLIFIER
TEAC CORPORATION
100V~, 50/60Hz, 210W
テイアック株式会社 TOKYO JAPAN
MADE IN CHINA

~ IN

CAUTION
RISK OF ELECTRIC SHOCK
DO NOT OPEN

ATTENTION RISQUE DE CHOC ELECTRIQUE
NE PAS OUVRIR

CAN ICES-3(B)/NMB-3(B)

12V TRIGGER

IN THRU


SOFTWARE

AUTO POWER SAVE

ON OFF

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING
TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND (2) THIS DEVICE MUST
ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRE OPERATION.

SERIAL
NO.

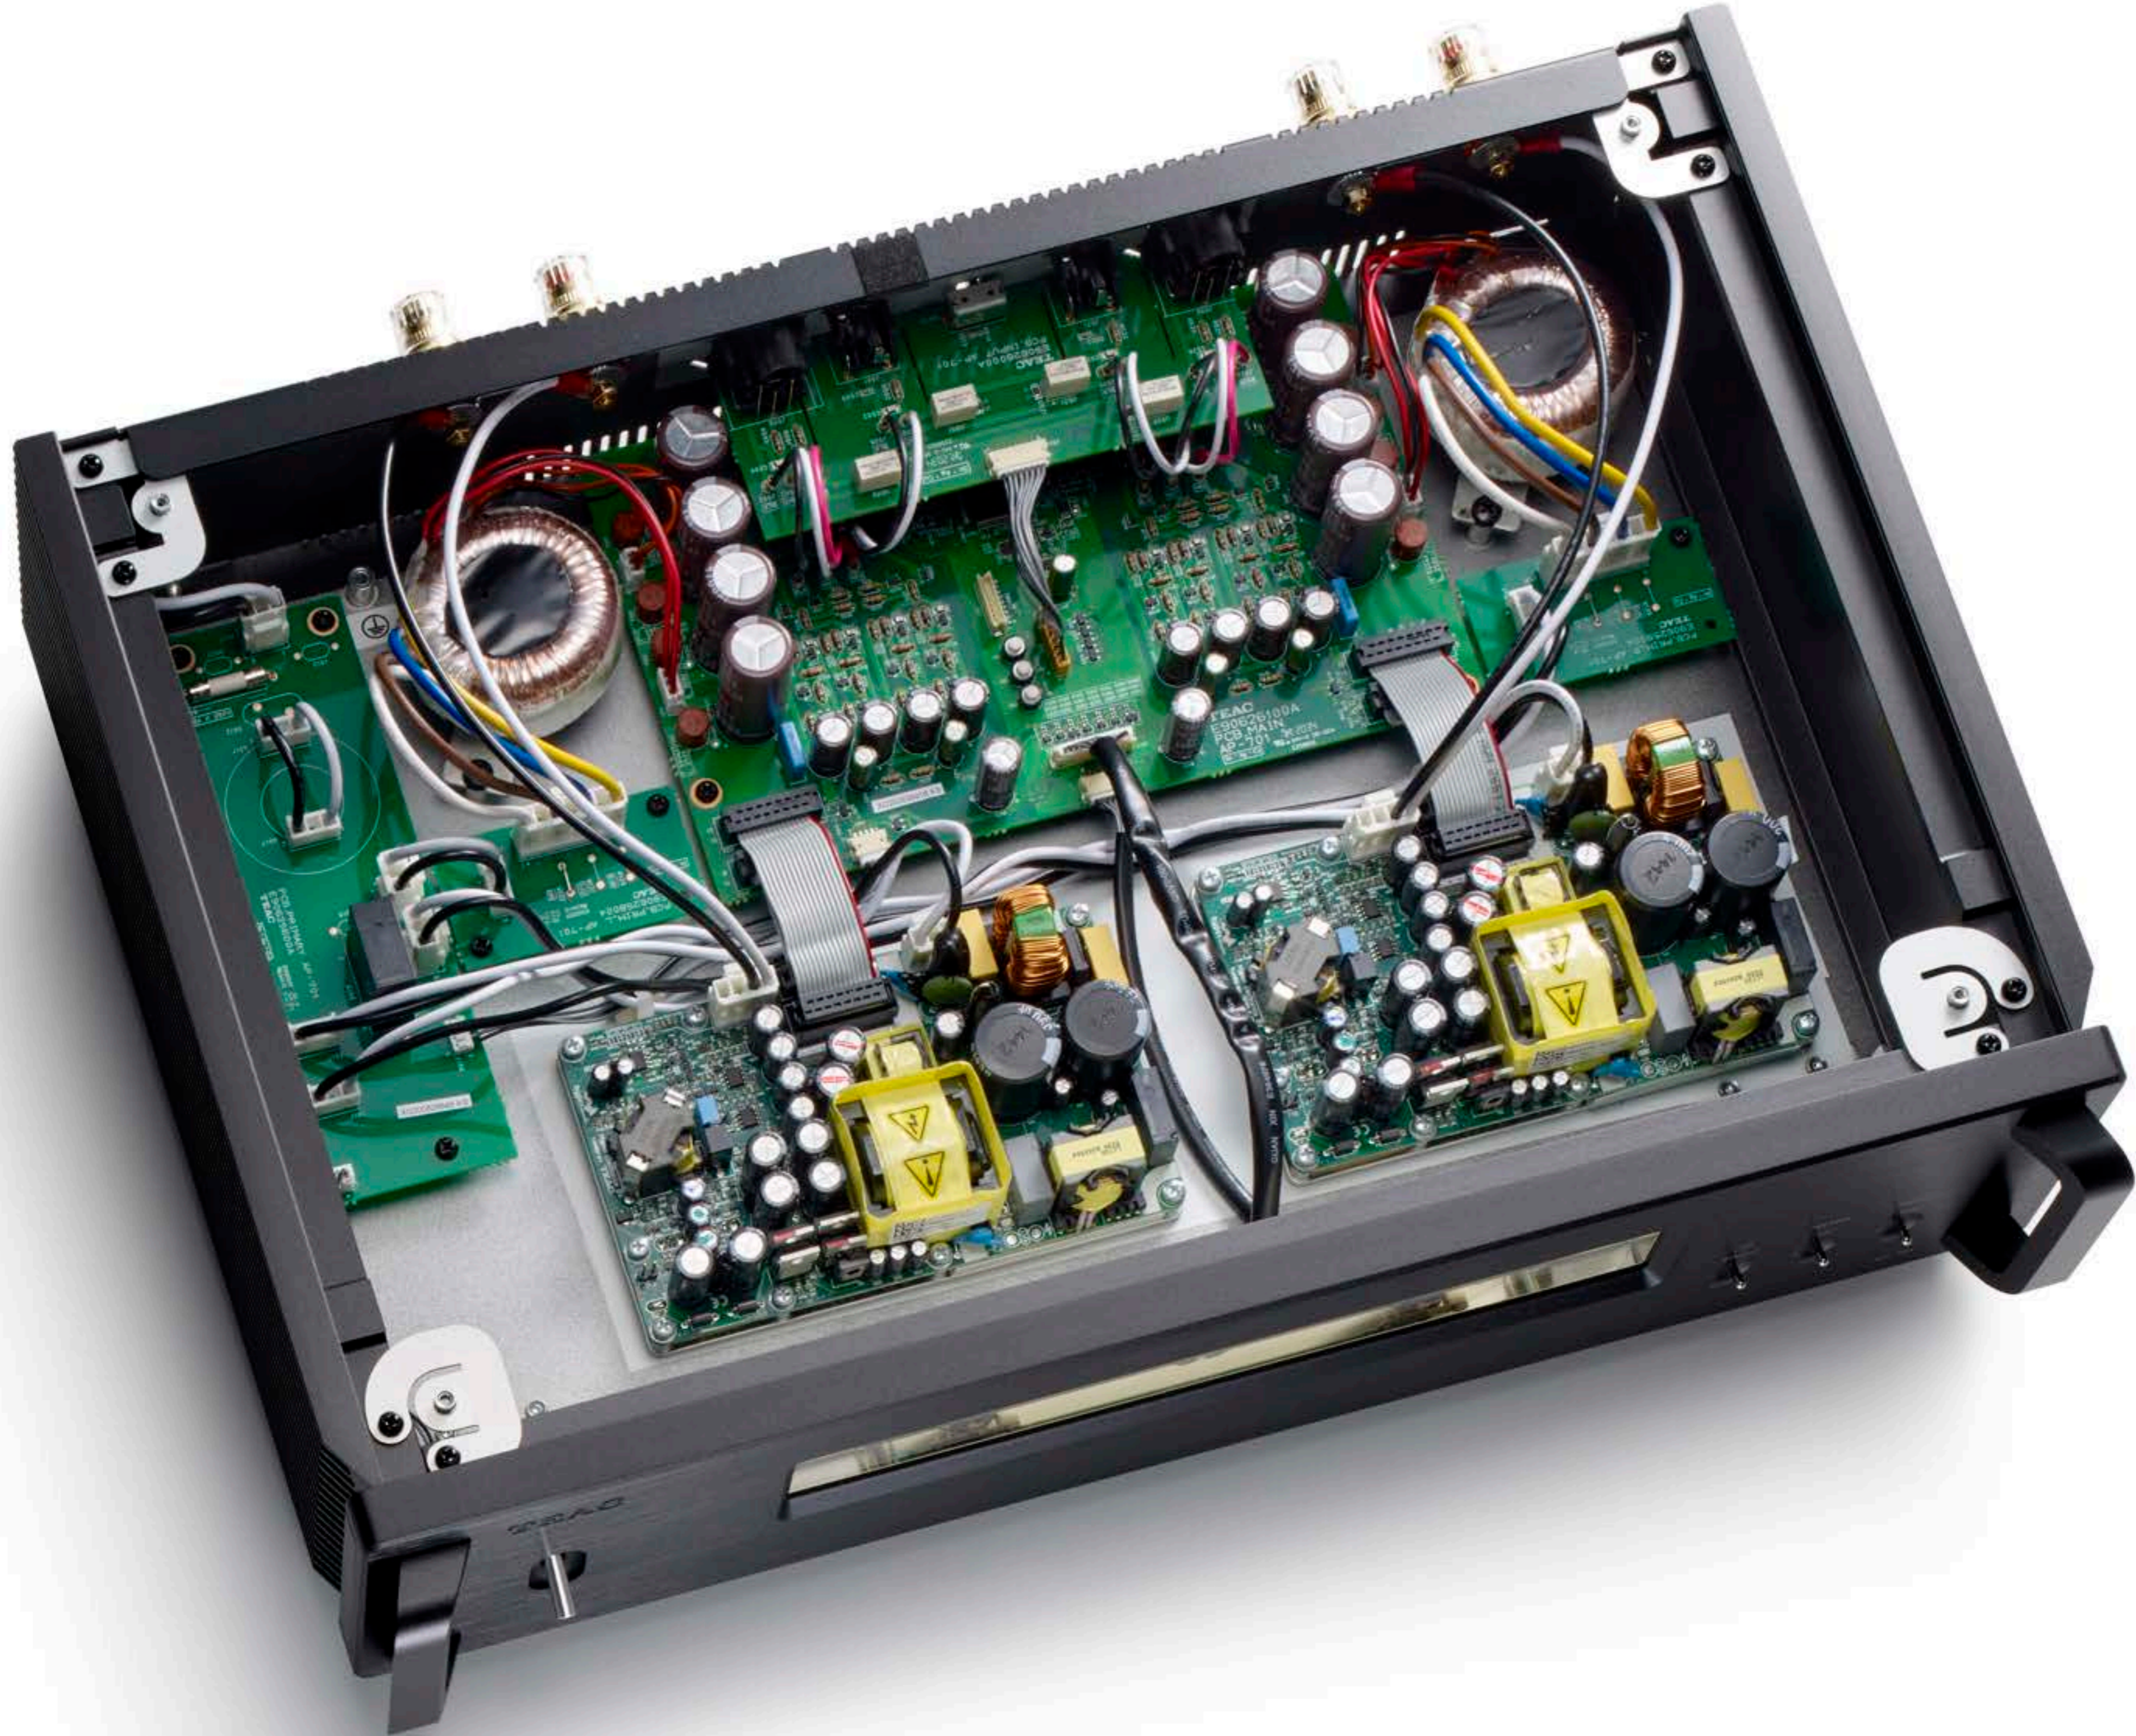







+

R

-

IMPEDANCE
- 8Ω
S 2 WIRING

1. COMMON
2. HOT (+)
3. COLD (-)

XLR

 **CAUTION**
RISK OF ELECTRIC SHOCK
DO NOT OPEN

ATTENTION : RISQUE DE CHOC ELECTRIQUE
NE PAS OUVRIR.

CAN ICES-3(B)/NMB-3(B)

SPEAKER



