

Power Supplies
Cables
OEM Products



INT204

USB to AES/EBU and S/PDIF Interface

- DSD64 and DSD128 to PCM conversion
- up to 384 kHz sampling frequency
- Optical remote control for volume
- Selectable sampling frequency for DSD to PCM conversion



DAC501, DAC502 Roon Ready D/A Wandler, Streamer und Signalprozessor

DSP501, DSP502 Roon Ready Interface, Streamer und Signalprozessor

DAC204, USB, S/PDIF D/A Wandler und Interface

DAC205, S/PDIF D/A Wandler

INT204, USB/DSD Interface

PSU102

Analog Power Supply

- analog, non-switched
- very low noise / high speed regulation
- 115V / 230V mains voltage selectable
- 5V / 6V / 9V / 12V selectable at 1.5A



MAN301R

The new version of our Music Archive Network Player

- Roon Core
- Sources: Roon, AES/EBU, UPnP, Airplay
- Web based remote control
- CD reading
- Built-in D/A Converter (optional)



PSU102

Power Supply
e.g. non-switching
low noise / high speed regulation
/ 230 V mains voltage selectable
6V / 9V / 12V selectable at 1.5A

DSP501, DSP502, Roon Ready
Interface, Streamer und Signalprozessor

DAC204, USB, S/PDIF D/A Wandler und Interface

DAC205, S/PDIF D/A Wandler

INT204, USB/DSD Interface

PSU102, ein univers
rauscharmes Net

MAN301R

- Roon Core
- Sources: Roon, AES/EBU, UPnP, Airplay
- Web based remote control
- CD ripping
- built-in D/A Converter (optional)



DAC205

- S/PDIF D/A Converter
 - Sampling frequency up to 192 kHz
 - RCA, Toslink inputs
 - Analog outputs on XLR and RCA
 - Four selectable output levels

www.QACMOS.com dedicated to geothermal converter

ACTIVE SPEAKERS


WEISS

Weiss Engineering offers a range of OEM modules created for high-end speaker designs.


D/A and A/D converters, connectivity to various input and output formats, and DSP processing for crossover filters, EQing, and more. The modules and processing can be modified to suit the client's requirements.




Scan the QR
for more info



Weiss **OEM products**

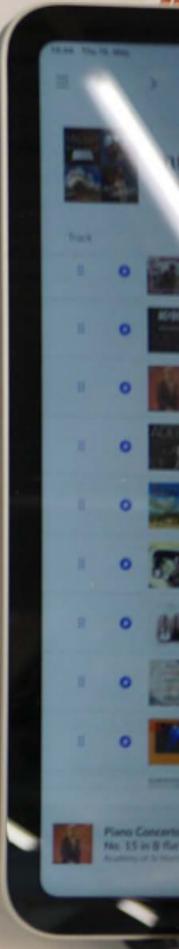

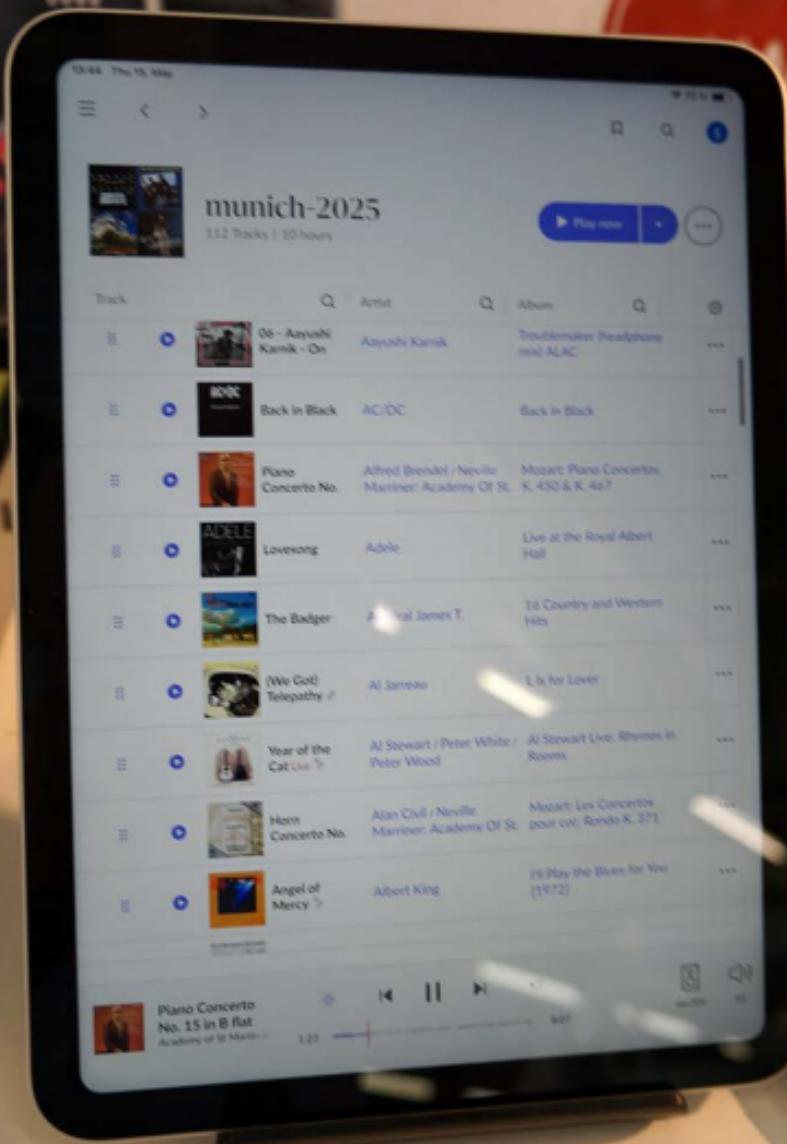



Kubala-Sosna
RESEARCH LLC


Master Reference
Cables

Connect to the performance





Volume 21
Input 1 Phono



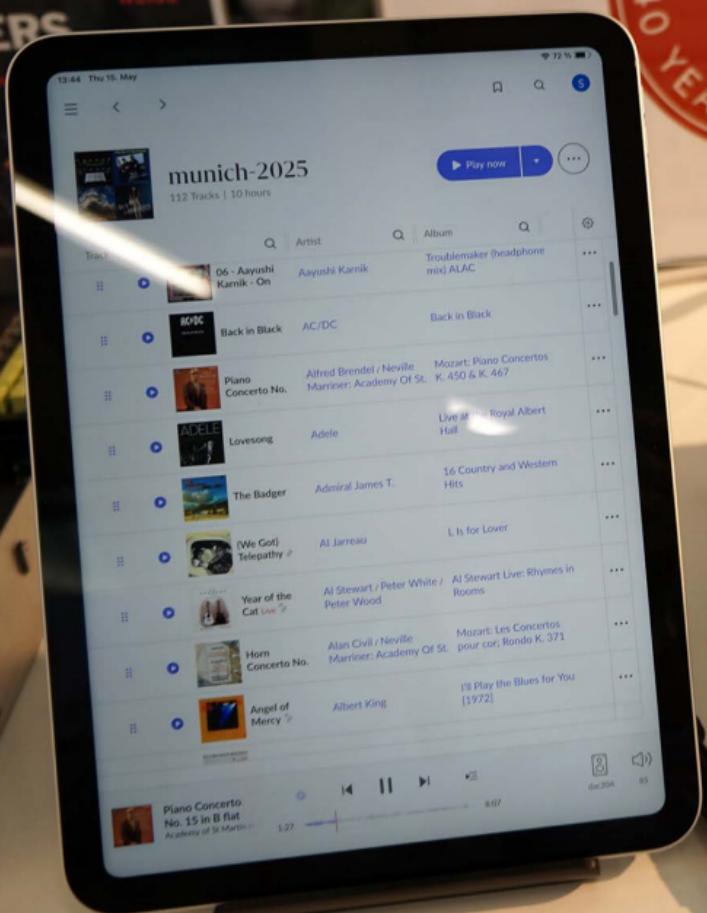

- USB, S/PDIF D/A Converter and Interface
- DSD64 and DSD128 to PCM conversion
- Sampling frequency up to 384 kHz
- USB, RCA Toslink inputs
- Digital and analogue outputs
- Four selectable output levels

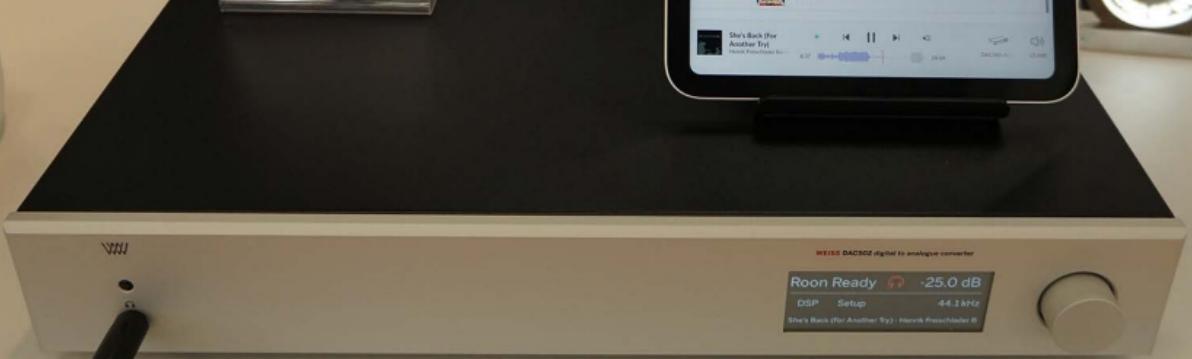

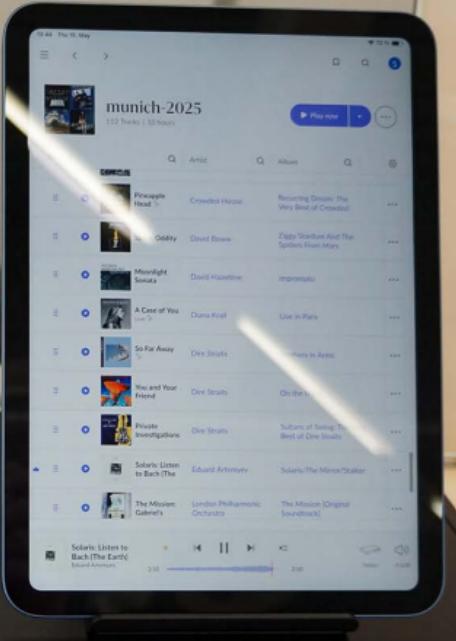



Kubala-Sosna
RESEARCH LLC

Master Reference
Cables

Connect to the performance





A new headphone equalizer approach

It lets the user tune the headphone equalizer according to his / her

- type of headphone used
 - personal taste
 - listening loudness
 - physical activity

Spend a few minutes with the calibration procedure and experience a new listening sensation. A voice will lead you through the simple process.

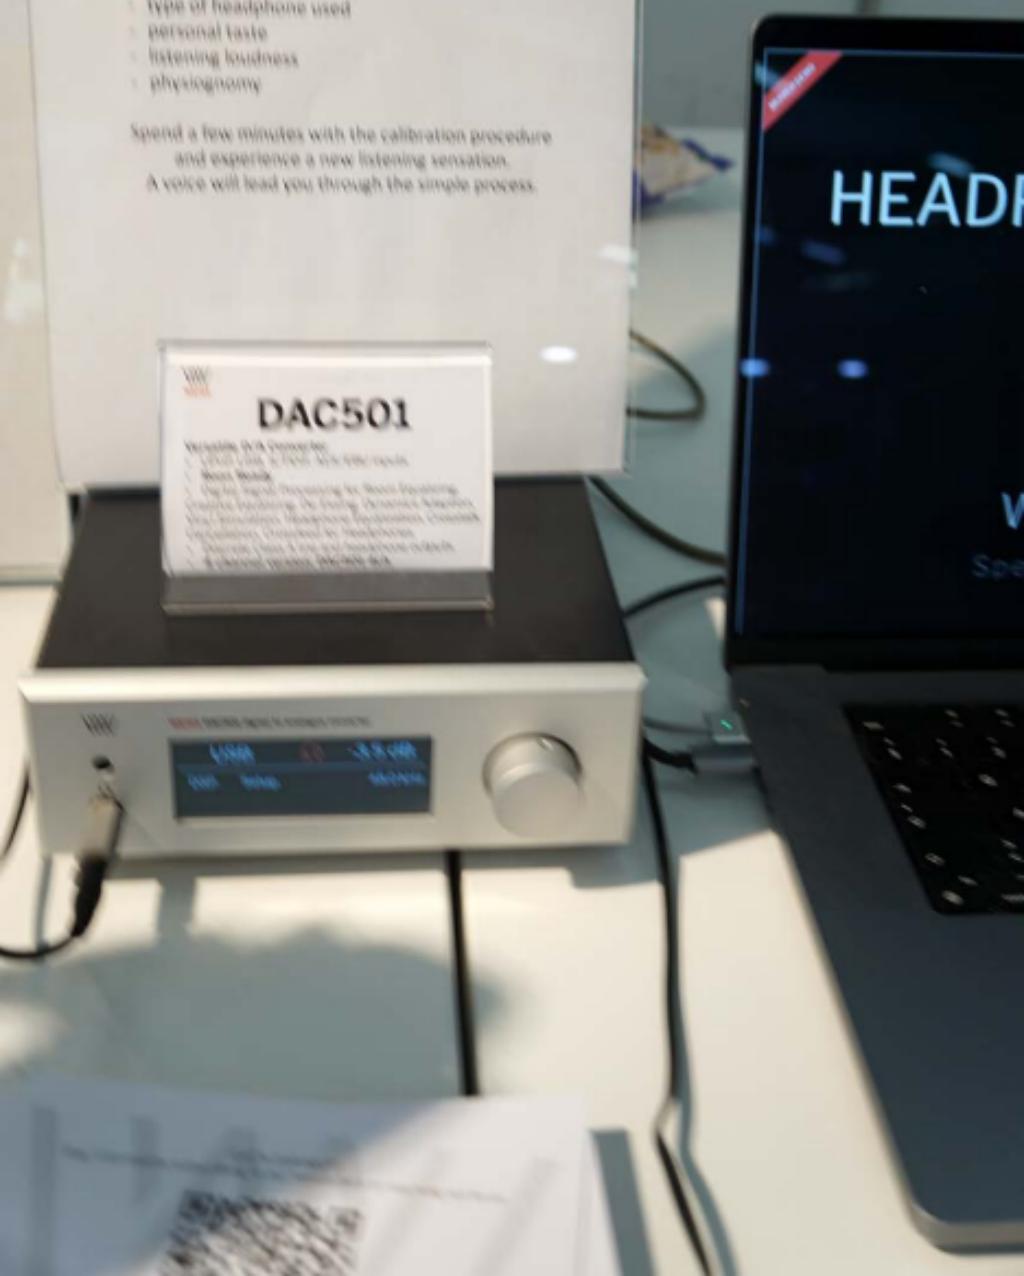



WEISS



Kamui Z4

SilentPower

iII



MALKYNE

OMNILAN

