



**WEISS DAC204** digital to analogue converter

input selector



DSD  power  
176.4  192.0  
88.2  96.0  
44.1  48.0

DSD conversion



on







**WEISS DAC204** digital to analogue converter

input selector

TOS  
USB  
RCA


- DSD  power
- 176.4  192.0
- 88.2  96.0
- 44.1  48.0

DSD conversion

176.4 24bit  
88.2 16bit

on





**WEISS DAC204** digital to analogue converter



input selector

TOS
<input checked="" type="radio"/> USB
RCA

DSD  power

176.4  192.0

88.2  96.0

44.1  48.0

DSD conversion

176.4 <input checked="" type="checkbox"/>	24bit <input checked="" type="checkbox"/>
88.2 <input checked="" type="checkbox"/>	16bit <input checked="" type="checkbox"/>

on







**WEISS DAC204** digital to analogue converter

input selector

TOS  
USB  
RCA

DSD	<input checked="" type="checkbox"/>	power	<input checked="" type="checkbox"/>
176.4	<input checked="" type="checkbox"/>	192.0	<input checked="" type="checkbox"/>
88.2	<input checked="" type="checkbox"/>	96.0	<input checked="" type="checkbox"/>
44.1	<input checked="" type="checkbox"/>	48.0	<input checked="" type="checkbox"/>

DSD conversion

176.4	24bit
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
88.2	16bit
<input type="checkbox"/>	<input type="checkbox"/>



on



analogue out right



analogue out left

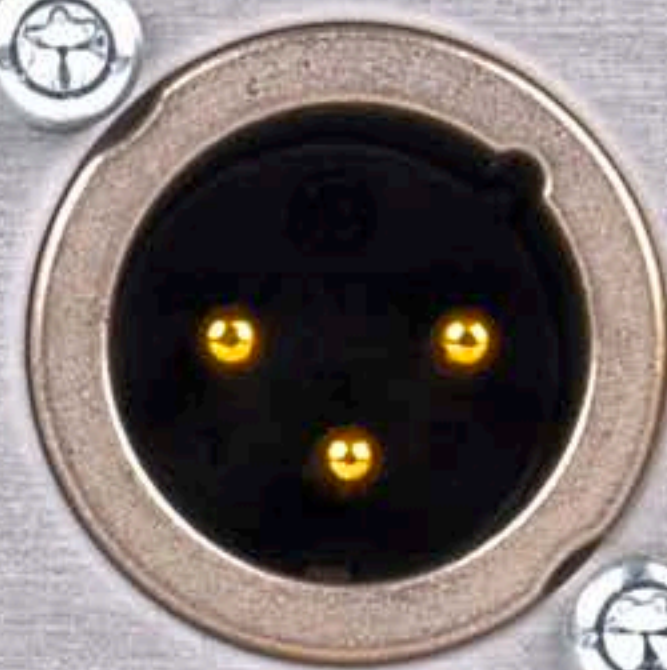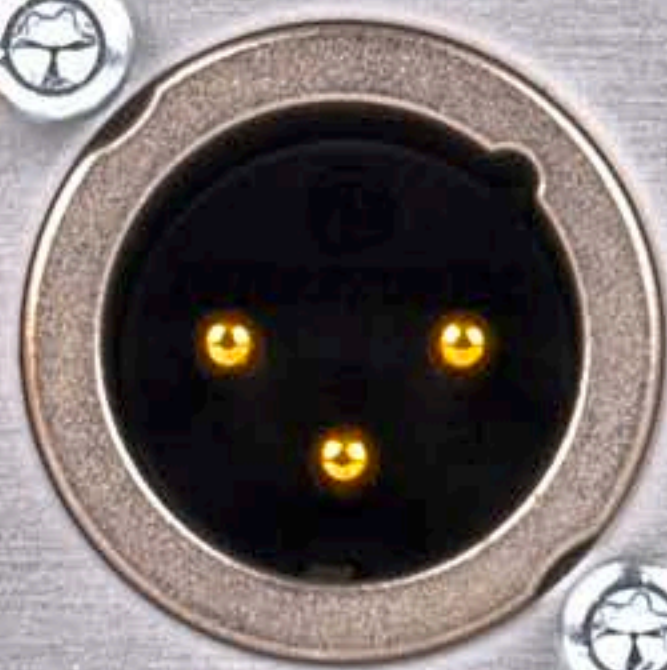

10dB

20dB

analogue attenuation




S/PDIF in



AES/EBU out



power  
6...9V



USB  
in



S/PDIF out



SNR:

made in switzerland

